



DTB34RT

This telescopic platform has a very low centre of gravity, resulting in excellent stability and outstanding lifting performance. It is equipped with a fuel-saving diesel engine and 4 steering drive wheels integrated into the axle for improved offroad performance.



STANDARD EQUIPMENT

- Proportional controls
- Thumb rocker steering
- Flashing light
- Horn
- Hour counter
- Harsh Environment Kits
- 12V DC Auxiliary Power

PERFORMANCE

- Front oscillating axles to match the terrain irregularities granting optimal adherence to the ground
- 4 Wheels Steering
- Four-wheel drive
- Positive traction four wheel drive
- 360° rotation (continuous)
- Integral Integrated Special Drive Axle

ENGINE

- Stage V engine (Stage IIIA available upon request)
- Auto Engine Fault Shutdown
- Anti-reverse Engine Device
- Anti-restart Engine Protection
- Hydraulic oil radiator

BASKET

- Self levelling platform
- Rotating basket +/-90°
- Power to platform

SAFETY

- Drive enable system
- Platform load sense system
- On-board diagnostics system
- Tilt indicator with alarm
- Crushing protection
- Emergency lowering system

STANDARD EQUIPMENT



Construction



Large Events



Aircraft maintenance
Ship repair



Plant Service



Oil & gas




Restoration

DTB34RT



Max. working height	34,14 m
Max. basket height	32,14 m
Max. reach	21,60 m
Max. platform load capacity	454 kg
Max. Occupants	3
Max. gradeability (stowed)	X-5°/Y-5°
Max. working slope	45%
Max. wind speed	12,5 m/s
Turning radius (outside)	3,22 m
Turning radius (inside)	1,87 m
Turret rotation (continuous)	360°
Jib type	Regular
Jib length	0,6 m
Jib movement	68°
Jib vertical rotation	135°
Basket width	0,91 m
Basket length	2,44 m
Basket rotation	180°
Total weight	19.150 kg
Travel speed (closed config.)	6 km/h
Travel speed (working config.)	1,1 km/h
Tyres	385/45-28
Engine	Deutz TD2.9 L4/55.4kW
Diesel tank capacity	135 l
Hydraulic tank capacity	165 l
Electrical system	-
Emergency power system	12V
Transmission	Hydrostatic

LOAD CHART

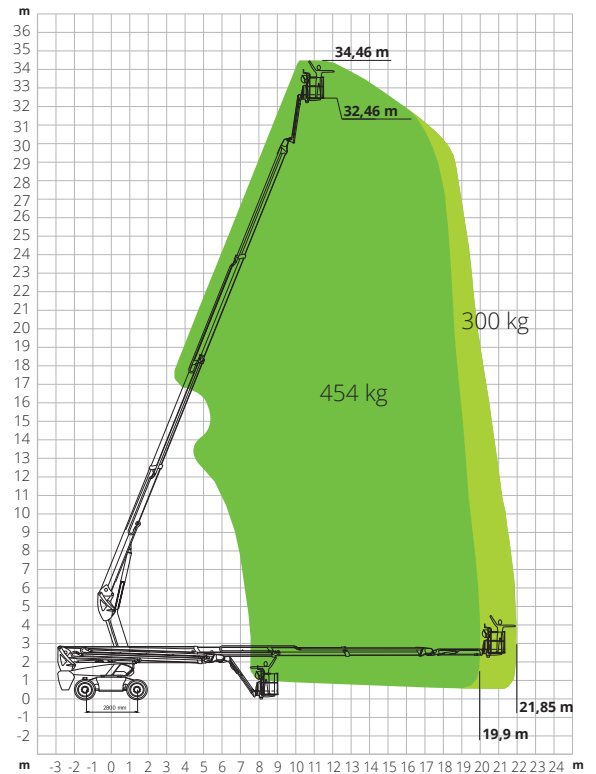

DIMENSIONS

A Platform length	11,63 m
Platform length (transport)	11,79 m
B Platform width	2,50 m
Platform width (transport)	2,28 m
C Platform height	2,86 m
Platform height (transport)	2,58 m
D Wheelbase	2,80 m
Tailswing	1,61 m
Ground clearance	0,41 m

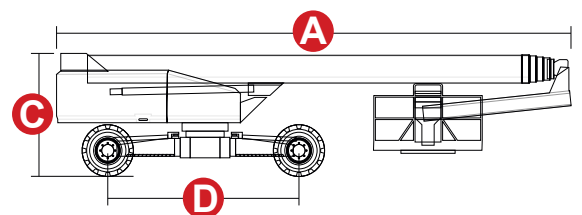

STANDARDS COMPLIANCE: EN 280, ANSI/SAIA A92.20

#LIFTDIFFERENT

www.magnith.com



The data in this brochure are provided for the purposes of information and subject to change without notice.