

# ES1208AC

This model is electrically driven and has a robust and mobile structure. The electric scissor lift system saves energy, ensuring zero emissions and a silent-running. It is ideal for indoor usages. The compact design and dimensions allow to pass through standard doors, ensuring maximum flexibility.



## STANDARD EQUIPMENTS:

- Proportional controls
- Self-locking door on the platform
- One way platform extension deck
- Non-marking tyres
- 2-wheel drive
- 2 Wheels Steering
- Automatic braking system
- Emergency lowering
- Onboard diagnostics system
- Motion Alarm
- Tilt indicator with alarm
- Horn
- Hour counter
- Charging protection system
- Warning siren during lowering and dual flashing LED light
- Safety bracket for maintenance operations
- Automatic pothole protection system
- Charging indicator
- Emergency brake release
- Anchoring eyebolts
- Tie-down and lifting points
- Self-weight lowering system
- Emergency pump

## MAIN APPLICATIONS



Maintenance



Plant Service



Construction



Storage/  
Warehouse



Cleaning






Painting/  
Restoration

## ES1208AC

Load capacity	250 kg
Load capacity when extended	113 kg
Max no. Occupants (Indoor/outdoor)	2/1
<b>A</b> Working height	12 m
<b>B</b> Platform floor level height	10 m
<b>C</b> Overall length	2,48 m
<b>D</b> Overall width	0,83 m
<b>E</b> Overall height (rails up)	2,51 m
<b>F</b> Transport height (rails down)	2,05 m
Platform dimensions (length/width)	2,27 m x 0,81 m
<b>G</b> Platform extension	0,90 m
Ground clearance (stowed)	0,10 m
Ground clearance (raised)	0,019 m
<b>H</b> Wheelbase	1,87 m
Turning radius (inside)	0m
Turning radius (outside)	2,10 m
Driving motors	2 x 15 VAC/0,87 kW
Lifting motors	15VAC/3,5 kW
Travel speed (stowed)	5 km/h
Travel speed (raised)	0,8 km/h
Batteries	24V/240 Ah
Integrated battery charger	24V/30A
Gradeability	25%
Maximum working slope	X-1.5°/Y-3°
Non-marking tyres	381x127mm
Weight (CE)	3150 kg

**STANDARDS COMPLIANCE:**  
EN 280, ANSI/SAIA A92.20

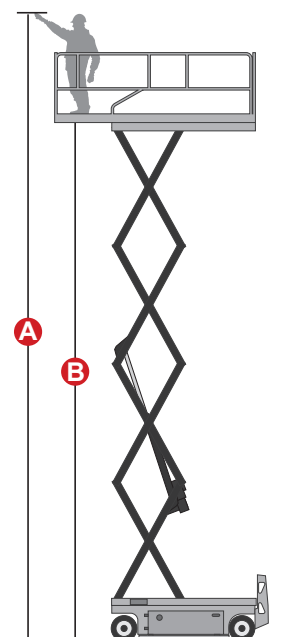

Non-marking solid tyres



Safety bracket