

MJP 11.5 AC

This vertical mast platform is battery-powered. It has a light but robust structure to work in total safety. The 345° turret rotation is the optimal solution to work both indoor and outdoor. The boom tilt is very useful for indoor maintenance.



STANDARD EQUIPMENTS:

- Proportional controls
- Pothole protection
- Self-locking door on the platform
- Permissible side-shift at maximum height
- platform horizontal outreach
- Non-marking tyres
- 2WD
- 2 Wheels Steering
- Automatic braking system
- Emergency lowering
- Emergency stop button
- Onboard diagnostics system
- Tilt indicator with alarm
- Movement alarm sensor
- Horn
- Counter Hour
- Charger protection
- Flashing beacon
- Swing-out carter for easy maintenance
- 345° turret rotation
- 3 m horizontal extension
- Explosion-proof tubing system
- Platform load sense system
- Drive enable system
- Charging indicator
- Manual brake release
- Tie-down and lifting points
- Integrated holes for fork transport

MAIN APPLICATIONS



Maintenance



Plant Service



Construction



Cleaning




Painting
Restoration

MJP 11.5 AC

| | |
|------------------------------------|--|
| Load capacity | 200 kg |
| Max no. occupants | 2/1 |
| Working height | 11.2 m |
| Max platform height | 9.2 m |
| Max horizontal outreach | 3 m |
| Up and over height | 7.89 m |
| A Overall length | 2.62 m |
| B Overall width | 1 m |
| H Overall height | 1.99 m |
| Platform size (length/width) | 0.62 m x 0.87 m |
| Ground clearance (stowed) | 0.07 m |
| Ground clearance (raised) | 0.02 m |
| C Wheelbase | 1.22 m |
| Turning radius (inside/outside) | 0 / 1.80 m |
| Turret rotation | 345° |
| Jib movement | +70°/-60° |
| Drive motor | 24 V / 1.5 kW |
| Lifting motor | 24 V / 3 kW |
| Travel speed (stowed) | 4.5 km/h |
| Travel speed (rated) | 0.5 km/h |
| Up\Down Speed | 95 / 50 sec |
| Batteries | 24 V / 240 Ah AGM batteries maintenance free |
| Integrated charger | 24 V / 30 A |
| Gradeability | 25% |
| Maximum working slope (indoor use) | 2,5° / 2,5° |
| Non-marking tyres | 381x127 mm |
| Weight | 2,950 kg |

STANDARDS COMPLIANCE: EN 280, ANSI/SAIA A92.20

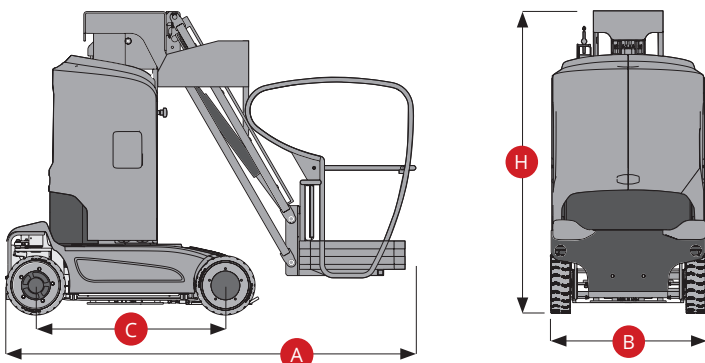

Pothole protection



Integrated holes for fork transport

LOAD CHART

